



南京南山一风华高科直接授权代理  
025-84712762 84712745 52188228  
<http://www.nscn.com.cn>

## THREE TERMINAL NEGATIVE VOLTAGE REGULATORS -10V FH79L10

### -10V 三端稳压器 SOT-89

#### FEATURES

- Best Suited to Power Supply for TTL, C<sup>2</sup>-MOS
- Built-in Overcurrent Protective Circuit
- Built-in Thermal Protective Circuit
- Max. Output Current 150mA ( $T_j=25^\circ\text{C}$ )
- SOT-89 Packaged in Power Mini .



1.Gnd 2.Vin 3.Vout


Characteristic		Symbol	Rating	Unit
Input Voltage	(5V~15V)	V <sub>lin</sub>	- 35	V
	(18V~24V)		- 40	
Power Dissipation ( $T_c=25^\circ\text{C}$ )		PD	500	mW
Operating Junction Temperature		T <sub>j</sub>	- 30 ~ 150	
Operating Temperature		T <sub>opr</sub>	- 30 ~ 75	
Storage Temperature		T <sub>stg</sub>	- 55 ~ 75	

#### DEVICE MARKING 打标


FH79L10 = 9E

#### EQUIVALENT CIRCUIT

#### 等效电路图

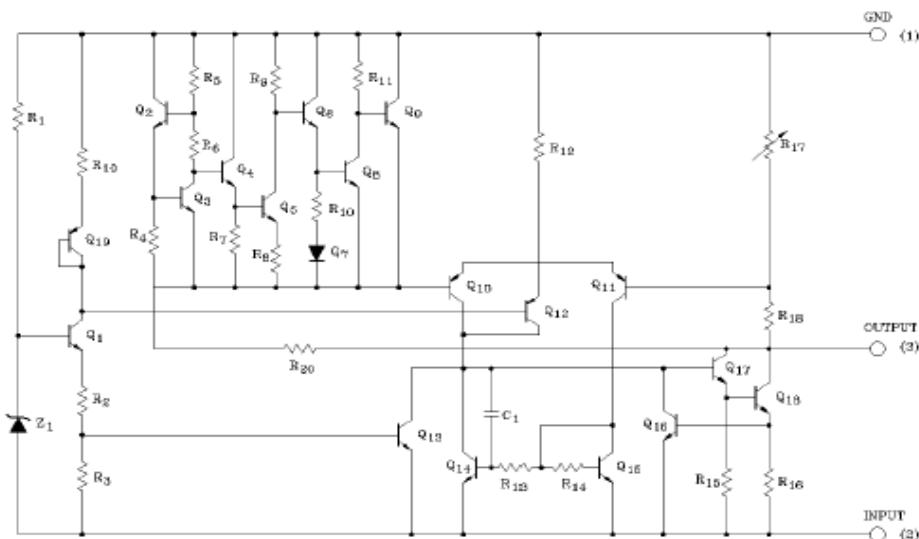

## TEST CIRCUITS

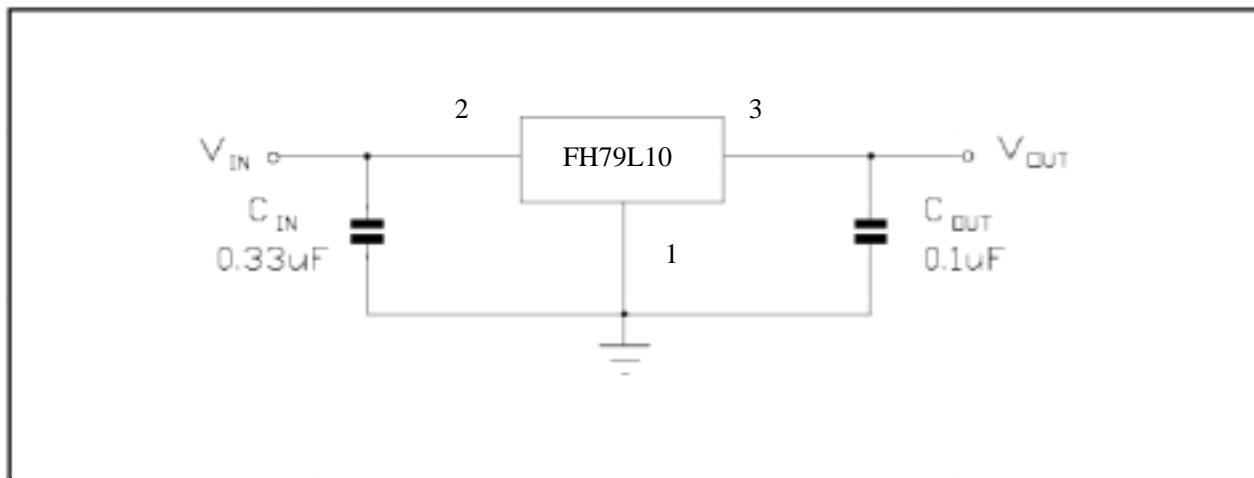

## ELECTRICAL CHARACTERISTICS


### FH79L10

Unless otherwise specified ,Vin=-16V, Iout=40mA, Cin=0.33uF, Cout=0.1uF , Tj=0 to125

CHARACTERISTIC	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	Vout	Tj=25		-10.4	-10	-9.6	V
Input Regulation	Reg line	Tj=25	-25V≤Vin≤-12.5V,	-	80	230	mV
			-25V≤Vin≤-13V,	-	30	170	
Load Regulation	Reg load	Tj=25	1.0mA≤Iout≤100mA	-	18	90	mV
			1.0mA≤Iout≤40mA	-	8.5	45	
Output Voltage	Vout	-25V≤Vin≤-12.5V, 1.0mA≤Iout≤40mA		-10.5	-	-9.5	V
		Vin=-16V, 1.0mA≤Iout≤70mA		-10.5	-	-9.5	
Quiescent Current	IQ	Tj=25		-	3.2	6.5	mA
		Tj=125		-	-	6.0	
Quiescent Current Change	IQ	-25V≤Vin≤-13V,		-	-	1.5	mA
		1.0mA≤Iout≤40mA		-	-	0.1	
Output Noise Voltage	V <sub>NO</sub>	Ta=25 , 10Hz ≤f≤100kHz		-	70	-	uVrms
Long Term Stability	Vout/ t			-	22	-	mV/1.0 kHrs
Ripple Rejection Ratio	RR	F=120Hz, -24V≤Vin≤-13V, Tj=25		37	43	-	dB
Dropout Voltage	Vin-Vout	Tj=25 , Iout=40mA			1.7		V
Average Temperature Coefficient of Output Voltage	TCvo	Iout=5mA		-	-0.9	-	mV/



## SOT-89 封装外形尺寸 ( SOT-89 DIMENSION )

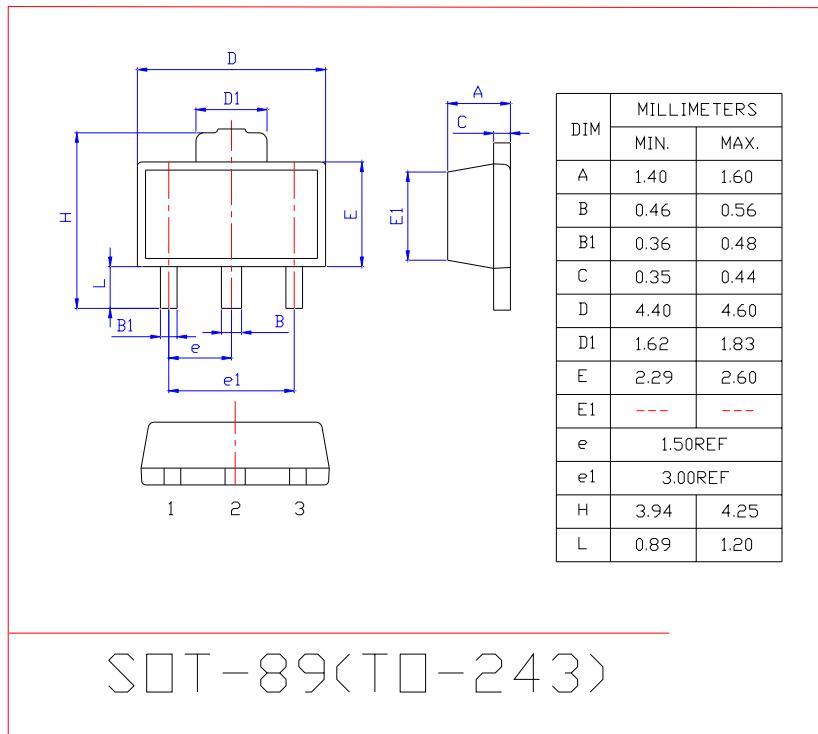

## 编带包装规格 ( SOT-89 TAPE AND REEL SPECIFICATION AND PACKING SPECIFICATION )

